

# SKYDOOME®

**SKYLIGHT SYSTEMS THAT DON'T COST THE WORLD**

## *Skytube 400*

The *Skytube 400* Tubular Skylight is designed for use in areas that require maximum light, while maintaining a minimum heat transfer.


The *Skytube 400* transfers natural light into any room that suffers from poor light levels, natural light not only reduces the need for artificial light during the day, it can reduce your energy costs and greenhouse gas emissions.

*Skytube 400* is recommended for medium sized rooms such as kitchens, lounge/dining, meals area and larger hallways or entrance foyers and stairwells.

The *Skytube 400* utilises the high performance 98% reflective, "Silvertube". This is a solid light shaft to achieve maximum light transference. In situations where the light tube is angled from the roof to the ceiling area, **Skydome's** angle adaptor significantly reduces light depletion.

**Skydome's** low profile roof dome, collects the light, and nestles unobtrusively on your roof. The roof dome is available in clear for maximum bright light, and is also available in opal where a softer light is required.

The dome area is designed to allow for natural ventilation from the shaft. This allows warm air to rise up and outside of your roof. The stylish *400 series* diffuser is sleek with the moulded diffuser sitting elegantly onto your ceiling. The ceiling ring has no visible fixings when installed. The diffuser has a unique ventilation advantage if required, it can be opened at 3 stages. This allows for easy control of your ventilation, it can be totally closed at the ceiling when required.

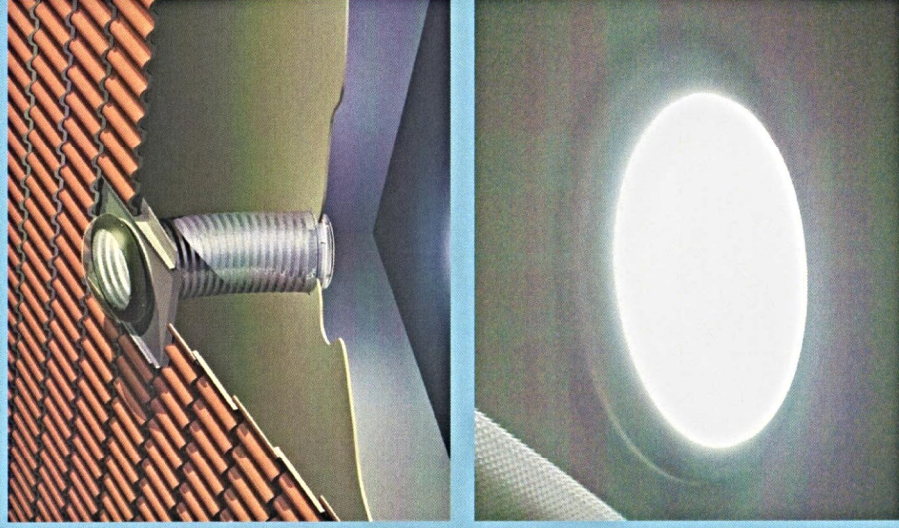

## Mechanically vented *Skytube 400*

Your *Skytube* can also be used as a powerful, yet quiet exhaust system for bathrooms, kitchens or laundries.

A 200mm diameter, 80 watt fan produces air displacement of 360 cubic metres of air (approximate) per hour (50 litres per second at diffuser).

The fan is mounted at the top of the light shaft at the bottom of the roof flashing unit. The motor is fitted with a 600mm power lead with 2 pin plug, it is covered by a 12 month warranty.

